

# Rockfon Pacific



Rockfon Pacific is an economical solution for budget-conscious projects. Rockfon Pacific does not compromise on high-performance acoustics, sag resistance or fire performance, making it a market-leading choice for simple projects.

### Physical Description

- Stone wool tile
- Visible side: nuanced white painted fleece
- Rear side: back fleece

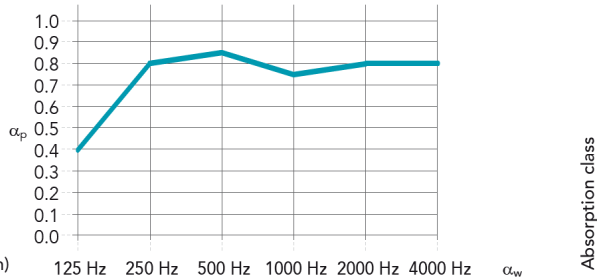
### Application Areas

- Budget office
- Retail
- Back-of-house areas

### Acoustic Properties



NRC: 0.80 to ISO354



Thickness (mm) / Suspension (incl. tile - mm)	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	$\alpha_w$	Absorption class	NRC
12 / 200	0.40	0.80	0.85	0.75	0.80	0.80	0.80	B	0.80

### What is Rockfon?

All Rockfon products comprise a non-combustible stone wool core that is non-hygroscopic and provides no sustenance for mould and microbes. The use of a backing fleece improves product performance and resilience, ensuring panels remain free from fractures and site-damage where panels are subject to frequent demounting. Products will maintain dimensional stability in environments with fluctuating humidity up to RH100. All Rockfon materials are warranted against manufacturing defects for 15-Years and have a declared service life of not less than 50-Years



## Material Properties

**Rockfon Pacific**



Stone wool is non-hygroscopic and provides no sustenance for microbes



Up to RH100 - No visible deflection to EN 13964  
*No on-site acclimatisation required*



Vacuum Clean



Light Reflectance 82% to ISO 7724-2



44% Recycled Content to ISO-14021. Recyclable at end-of-life



Non-combustible to AS1530.1  
Group 1 to AS5637.1:2015



LEED v4.0 Certification. Low emission



Thermal R-Value: 0.30m<sup>2</sup>K/W



Up to 15-years warranty against manufacturing faults  
*Refer to warranty and installation guidelines*



## Example Specification Wording

**CT-01** Acoustic Ceiling Tile  
Material: Rockfon Pacific  
Format: **1200 x 600mm Square Lay-In A24** edge  
Finish: Nuanced white non-perforated fleece to front, buff rear fleece  
Sound Absorption: 0.80NRC to ISO 354  
Light Reflectance: 82% to ISO 7724-2  
Moisture: RH100 sag-resistant non-hygroscopic antimicrobial stone wool core  
Fire: Non-Combustible to AS1530.1 & Group 1 to AS5637.1:2015  
Warranty: Up to 15-Years against manufacturing defects and visible sag  
Lead Time: Typically Stocked Item—Allow 14-weeks for project quantities  
Sustainability: LEED v4.0 Certification

## Example Image



## Format Options

Edge Detail*	Tile Format (mm)*	Approximate Weight (kg/m <sup>2</sup> )	T-Grid Description
 A24	600 x 600 x 12	1.6	Square Lay-In 24mm T-grid
	1200 x 600 x 12		
 E24	600 x 600 x 12	1.9	Recessed Lay-In 24mm T-grid

Supplied by



**Grayking Interior Supply Pty Ltd**

**NSW**

65A Stephen Road  
Botany New South Wales 2019

(02) 9666 6688

sales@grayking.com.au

**QLD**

(07) 3267 6222

sales@grayking.com.au

[www.grayking.com.au](http://www.grayking.com.au)

Official Australian Partner to:



**Rockfon**<sup>®</sup>