


Benefits

- Ideal for open plan spaces where control of ambient noise is an important consideration
- Excellent sound absorption for reduced reverberation and quieter spaces
- Sustainable Contribution
 - Global GreenTag^{CERT™} GreenRate™ Level A Certified for Green Star™
- Durable, reinforced, scratch resistant face
- New smooth finish with high light reflective finish for a brighter space
- Broad range of edge profiles
- Humiguard™ Plus RH99 Sag Resistance
- ISO 4 Clean Room Performance

Application Areas

- Open Plan offices
- Cafeterias
- Libraries
- Auditoriums
- Canteens
- Nurses Stations
- Lounges
- Cinemas/Theatres
- Restaurants

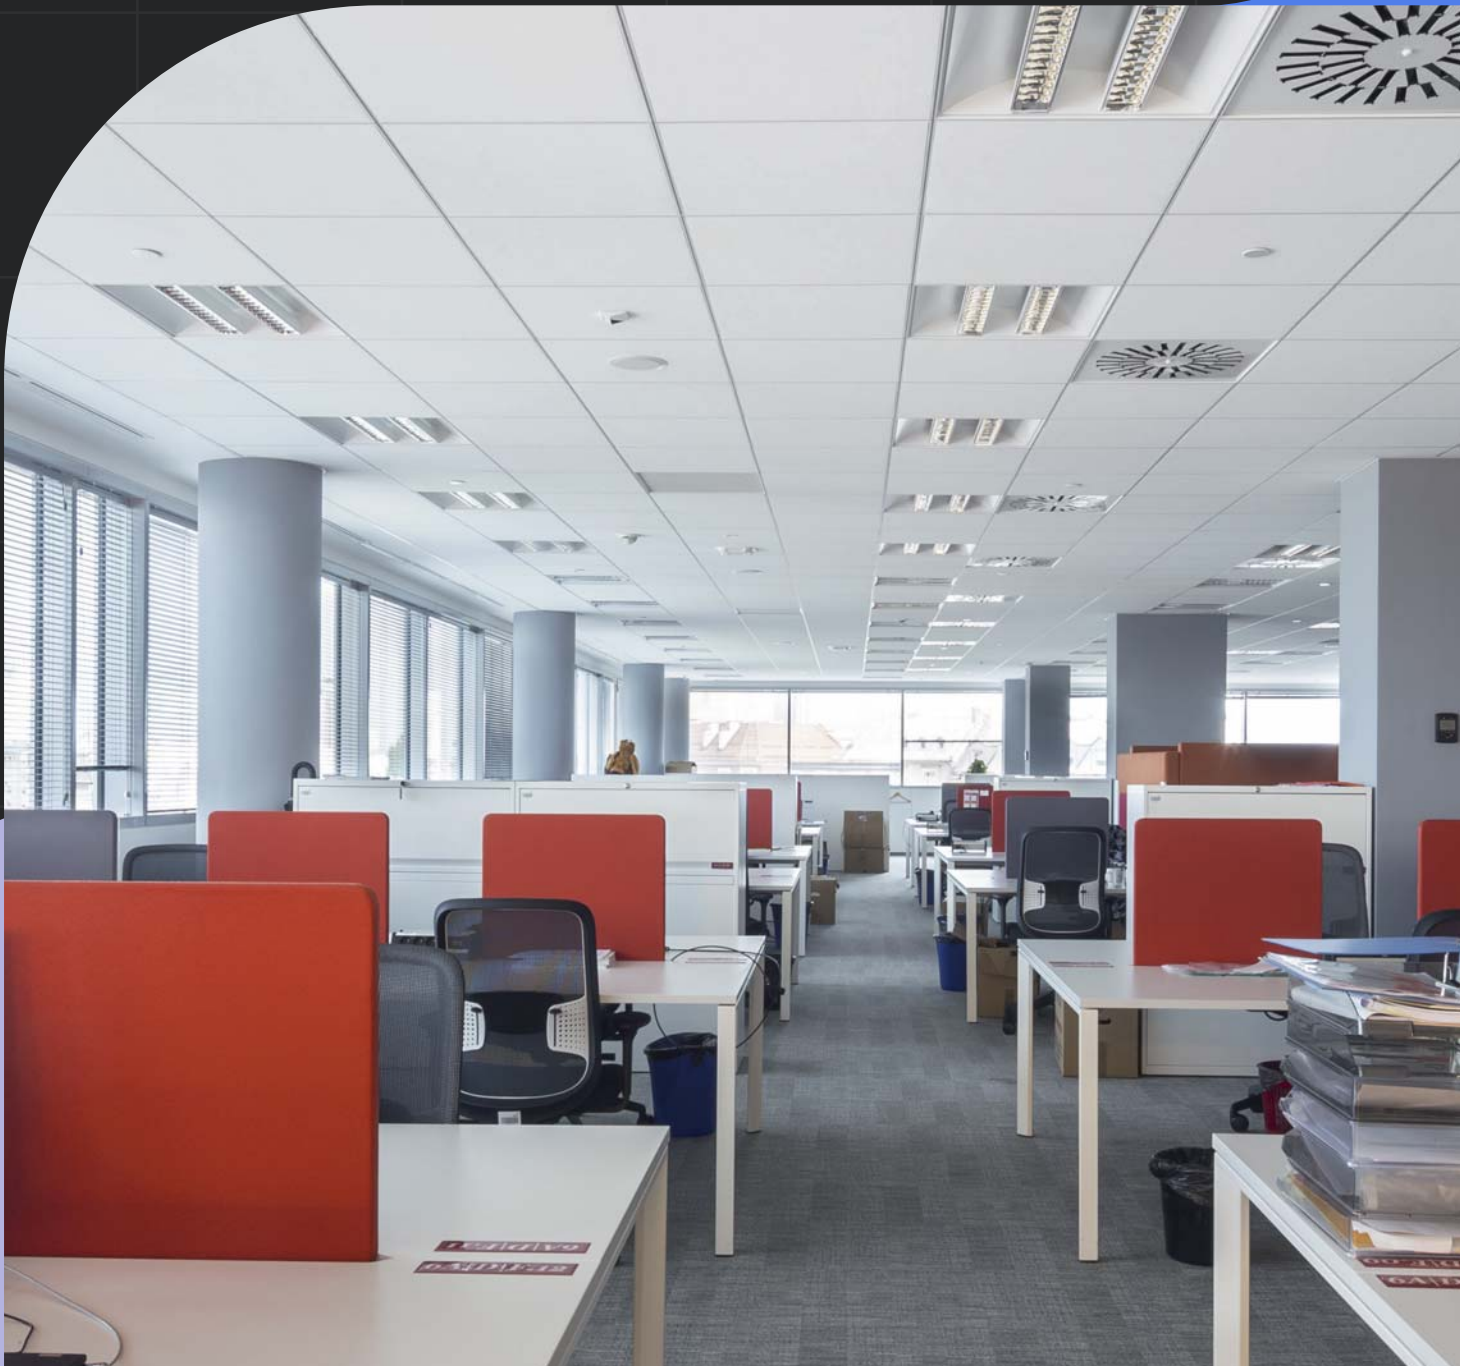

Ultima™ OP



RH99
Humidity
Resistant



Scratch
Resistant



Product
Handling
Durability



Cleanable



ISO 4 Clean
Room ISO
14644-1



Anti mould
and
mildew



Very Low
Emissions



Recycled Content
EN ISO 14021



Light Reflectance




Acoustical
Comfort

Panel Options


BOARD

TEGULAR 24/90


TEGULAR 15/90




Prelude™ 24mm Grid



Prelude 24mm Grid



Suprafine™ 15mm Grid



Silhouette™ 15mm Grid

600 x 600 x 15mm

1120G

1122G

1124G

1200 x 600 x 15mm

1121G

1123G

1125G

600 x 600 x 20mm

7682G

7678G

7685G

1200 x 600 x 20mm

7684G

7680G

7687G

Notes: 1. Special items and other sizes available upon request
2. For all items: Contact your local Armstrong Ceilings representative for stock availability




EN ISO 354 &
EN ISO 11654

Thickness NRC 125 250 500 1000 2000 4000 Hz

15mm 0.85 0.55 0.75 0.75 0.90 0.95 1.00 α_p

20mm 0.95 0.50 0.80 0.95 0.95 1.00 1.00 α_p

α_p



EN ISO 10848-2
& EN ISO 717-1

CAC

29 dB (15mm)

26 dB (20mm)



Humiguard™ Plus Sag Resistance (RH99% at 0°C – 49°C)
Refer to website for additional information



Conforms with NCC Spec. C1.10 as tested to AS
5637.1:2015 – Group 1, and ISO 5660 – Group 1 – S



Thermal Insulation (R- Value)
0.40 m²K/W



2.9 kg/m² (15mm), 3.5 kg/m² (20mm)

Material

Wet-formed
mineral fibre
with durable
acoustically
transparent
membrane

Surface Finish

Factory applied acrylic paint

Backloading Recommendation

Contact your local Armstrong
Ceilings representative

Suspension Systems

PeakForm™ Steel options
above, with ARMSTRONG
BLUE TONGUE®
Aluminium upon request

Green Star™: Potential contribution Interiors v1.3 / Design & As Built v1.3

Indoor Environmental Quality				Materials	
Credit 9/10 ACOUSTIC COMFORT	Credit 10.2A/11.2A LIGHTING COMFORT SURFACE ILLUMINANCE	Credit 11.1B/12.1B VISUAL COMFORT: DAYLIGHT	Credit 12/13 INDOOR POLLUTANTS	Credit 21C-D/21C-D SUSTAINABLE PRODUCTS – “Level A” Third Party Certification Environmental Product Declarations	Credit 22/22 CONSTRUCTION AND DEMOLITION WASTE
✓	✓	✓	✓	✓	✓



Distributed by



Grayking Interior Supply

NSW (02) 9666 6688
QLD (07) 3267 6222
sales@grayking.com.au
grayking.com.au



Madex Linings & Ceiling Distributors

VIC (03) 9336 2419
info@mlcd.com.au
mlcd.com.au



M & C Plaster Supply

VIC (03) 9362 0214
info@mcplaster.com.au
mcplastersupplies.com.au